

A

B

C

D

E

F

A

B

C

D

E





F

NOTES :

1. THE FOLLOWING INFORMATION IS OBTAINED FROM THE PROJECT DESIGN DRAWINGS:
- a. POLE LENGTH AND STRENGTH.
  - b. SPECIAL FOUNDATION REQUIREMENTS.
  - c. POLE EMBEDMENT DEPTH.
  - d. CONDUCTOR SIZE.
  - e. CROSSARM SIZE.
  - f. STAY REQUIREMENTS.
  - g. DEVIATION ANGLE.
2. THE MAXIMUM LINE DEVIATION ANGLE TO BE CONSTRUCTED ON THIS ARRANGEMENT IS TO BE DETERMINED BY THE LINE DESIGNER.
3. POLE STEPS ARE TO BE INSTALLED IN ACCORDANCE WITH THE REQUIREMENTS OF NS128.
4. IN AREAS WHERE THE 11kV NETWORK CANNOT BE WORKED ON USING LIVE LINE TECHNIQUES, UNDERBUILT CIRCUITS SHALL BE INSTALLED WITH A MINIMUM CLEARANCE OF 1200mm. IN AREAS WHERE THE 11kV NETWORK CAN BE WORKED ON USING LIVE LINE TECHNIQUES, UNDERBUILT CIRCUITS SHALL BE INSTALLED WITH A MINIMUM CLEARANCE OF 2500mm.
5. ALL BOLTS AND INSULATOR PINS PASSING THROUGH TIMBER ARE TO BE COATED WITH GRAPHITE GREASE.
6. THE LOAD AND DEVIATION ALLOWABLE ON THE EYEBOLT IS TO BE DETERMINED FROM DRG: 520324.
7. POLES SHALL BE DRILLED, SCARFED AND DRESSED ON SITE. DRILLING AND SCARFING TO BE TREATED WITH APPROVED PRESERVATIVES.
8. TO MAINTAIN THE INTEGRITY OF A COVERED SYSTEM, IT IS ESSENTIAL THAT ALL STRIPPED AND PUNCTURED INSULATION IS CONTAINED WITHIN THE APPROPRIATE INSULATING COVER.
9. CCT CONDUCTOR INSULATION SHALL ONLY BE REMOVED BY THE USE OF AN APPROVED CCT CONDUCTOR STRIPPING TOOL.
10. A 2100mm CROSSARM IS TO BE USED AS THE DEFAULT CROSSARM. A 3070mm COMPOSITE FIBRE OR 3000mm STEEL CROSSARM IS TO BE USED WHEN THE MAXIMUM LOAD OF A TIMBER CROSSARM IS EXCEEDED.
11. ONLY THE 2100mm CROSSARM OPTION IS SHOWN ON THIS CONSTRUCTION DRAWING. REFER TO DRGS: 514377 & 237491 FOR DRILLING PATTERN OF ALTERNATE CROSSARMS.
12. SURGE ARRESTERS ARE TO BE INSTALLED ON AN OVERHEAD CCT CONDUCTOR SYSTEM IN ACCORDANCE WITH THE REQUIREMENTS OF NS126. IF A SURGE ARRESTER IS TO BE INSTALLED ON THIS CONSTRUCTION, IT IS TO BE INSTALLED AS PER THE RELEVANT ARRANGEMENT SPECIFIED ON DRG: 177151.
13. REFER TO DESIGNER SAFETY REPORT D25/136590 FOR ATYPICAL HAZARDS ASSOCIATED WITH THIS STANDARD CONSTRUCTION.

28	STEP - POLE, SCREW-IN (SEE NOTE 3)	250144	185198	A/R
27	COVER - PARALLEL, GROOVE CLAMP		144576	3
26	CLAMP - PARALLEL GROOVE, 2-BOLT		62414	3
25	WIRE - TIE, PREFORMED, INSULATED, CCT180		176312	2
	WIRE - TIE, PREFORMED, INSULATED, CCT120		144600	
	WIRE - TIE, PREFORMED, INSULATED, CCT80		144618	
24	WASHER - CONICAL, M16, GALVANISED	518082	H39647	2
23	WASHER - SQUARE, 50x50x6mm, GALVANISED (Ø18mm HOLE)	518081	H39257	2
22	INSULATOR - PIN POST, LONG STUD		145052	2
21	COVER - STRAIN CLAMP		144543	6
20	CLAMP - CONDUCTOR STRAIN, FOR CCT180		176313	6
	CLAMP - CONDUCTOR STRAIN, FOR CCT120		144527	
	CLAMP - CONDUCTOR STRAIN, FOR CCT80		144535	
19	INSULATOR - STRAIN ROD		144550	6
18	LINK - SAG, 70kN (PLP PART No. CTSLEW-070-1)		PURCHASE	6
17	BLOCK - GAIN, ALUMINIUM, 125mm (USE WITH 3070mm CROSSARM)		146282	2
	BLOCK - GAIN, ALUMINIUM, 100mm (USE WITH 2100mm & 3000mm CROSSARMS)		146274	
16	WASHER - FLAT, M20, GALVANISED (USE WITH 2100mm CROSSARM)	518081	177986	4
15	WASHER - FLAT, M20, GALVANISED	518081	177986	4
14	EYEBOLT - M20, GALVANISED (LENGTH TO SUIT POLE) (SEE NOTE 6)	513653		2
13	WASHER - SQUARE, 75x75x6mm, GALVANISED (Ø22mm HOLE) (USE WITH 3070mm CROSSARM)	518081	H39231	4
	WASHER - LIP, M24, GALVANISED (USE WITH 2100mm & 3000mm CROSSARMS)	518081	176912	
12	WASHER - SPRING, M20, GALVANISED (USE WITH 3000mm & 3070mm CROSSARMS)	518082	175569	4
	WASHER - CONICAL, M20, GALVANISED (USE WITH 2100mm CROSSARM)	518082	H39655	
11	EYEBOLT - M20x200mm, GALVANISED (SEE NOTE 6)	513653	H37881	4
10	WASHER - CONICAL, M20, GALVANISED	518082	H39655	4
9	WASHER - SQUARE, 75x75x6mm, GALVANISED (Ø22mm HOLE)	518081	H39231	12
8	BOLT & NUT - M20, HEX., GALVANISED (LENGTH TO SUIT POLE)	515466		2
7	WASHER - SPRING, M12, GALVANISED (USE WITH 3000mm & 3070mm CROSSARMS)	518082	H12047	4
	WASHER - CONICAL, M12, GALVANISED (USE WITH 2100mm CROSSARM)	518082	H39639	
6	WASHER - FLAT, M12, GALVANISED	518081	177982	8
5	BOLT & NUT - M12x150mm, HEX., GALVANISED (USE WITH 3070mm CROSSARM)	515466	46847	4
	BOLT & NUT - M12x180mm, HEX., GALVANISED (USE WITH 2100mm & 3000mm CROSSARMS)	515466	46888	
4	CROSSARM - 3070x125x125mm, ITEM 3, COMPOSITE FIBRE (SEE NOTES 10 & 11)	514377	H23787	2
	CROSSARM - 3000x150x100x5mm, RHS, GALVANISED (SEE NOTES 10 & 11)	514377	H23787	
	CROSSARM - 2100x150x100mm, TYPE H, HARDWOOD (SEE NOTES 10 & 11)	514374	H23745	
3	SCREW - COACH, M12x100mm, GALVANISED		H40484	2
2	BRACE - CROSSARM, FLAT, 690mm, GALVANISED	514385	H17738	4
1	POLE - TIMBER (AS REQUIRED)	513988		1

ITEM	DESCRIPTION	DRG. No	STOCK CODE	QTY
SCALE	1:20	STANDARD CONSTRUCTION 11kV LARGE DELTA CORNER CONSTRUCTION 2-31 CCT		
DESIGNED	PHILLIP JONES			
DRAWN	PATRICIA RIOS			
CHECKED	PHILLIP JONES			
APPROVED	STEPHEN CONNOR			
DATE	06/12/2006			
PROJECT NUMBER	STD			
TRIM REF NUMBER	-	SIZE A2	DRAWING No 174966	SHEET 1
				REV 4

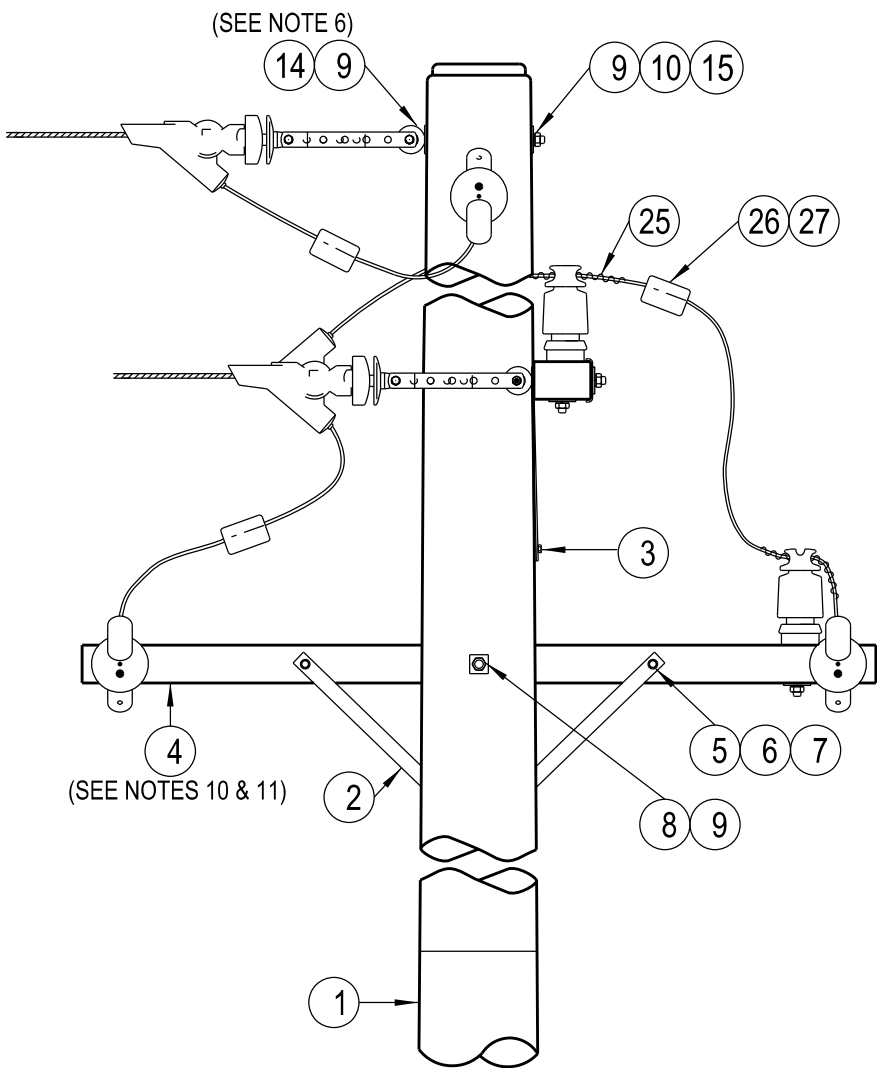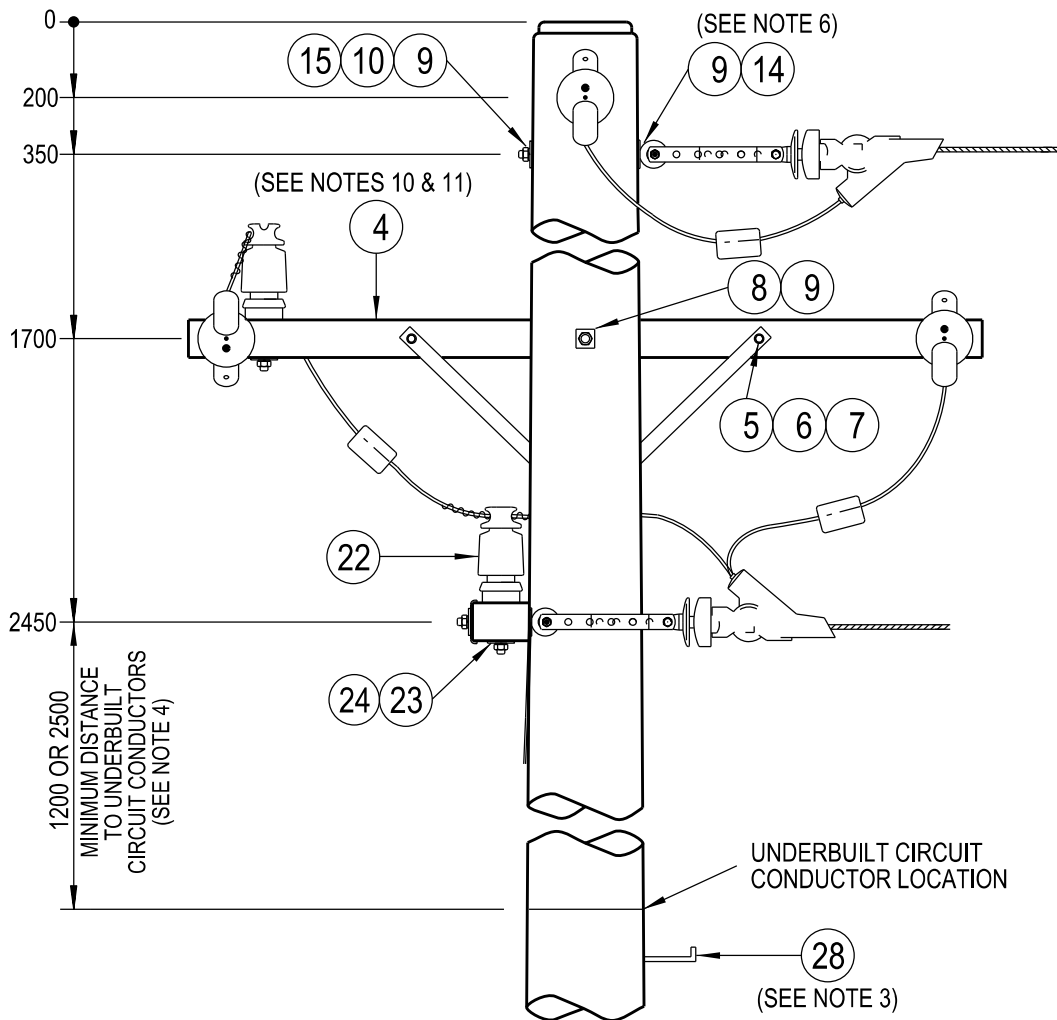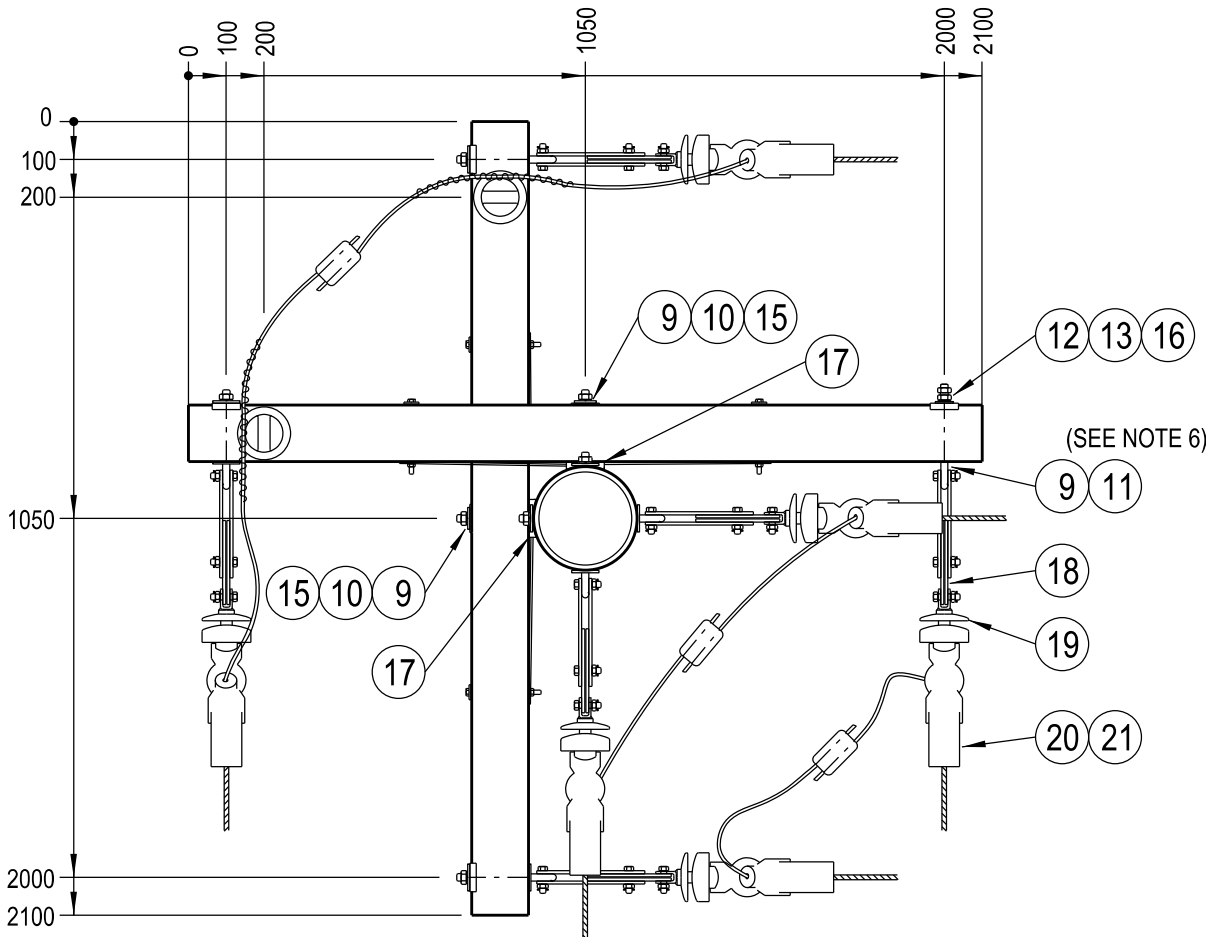

ALL DIMENSIONS IN MILLIMETRES UNLESS NOTED OTHERWISE.

DO NOT SCALE.

CAD DRAWING DO NOT MANUALLY AMEND AMENDMENTS	DWN: PATRICIA RIOS			
	CHKD: PHILLIP JONES			
	3	DATE: 16/08/2019 M20 WASHER ADDED. NOTES & MATERIAL LIST UPDATED. SHEET SIZE CHANGED.		
		APPD by: GLENN FORD		
		DWN: P.R.		
CHKD: P.J.				
APPD: G.F.				
4	DATE: 15/05/2025 NOTES & MATERIAL LIST AMENDED.			
ASSOCIATED DRAWINGS				
			11KV SURGE ARRESTER ARRANGEMENTS	177151
			COMPOSITE FIBRE CROSSARM MECHANICAL LOAD REQUIREMENTS	237491
			HV TERMINATION STEEL CROSSARM CONSTRUCTION DETAILS	514377
			20mm EYEBOLT LOADING & DEVIATION GRAPH	520324

