



- NOTES:
- THE DUAL LV ABC INTERMEDIATE CONSTRUCTION HAS BEEN SHOWN FOR DIAGRAMATIC PURPOSES ONLY. THIS UGOH CONSTRUCTION CAN BE CONSTRUCTED ON ANY APPROPRIATE DUAL LV ABC STANDARD CONSTRUCTION.
 - THE NON-METALLIC CABLE COVER IS TO BE INSTALLED TO A MINIMUM HEIGHT OF 3000mm ABOVE GROUND LEVEL. THE BASE OF THE CABLE COVER IS ALSO TO BE INSTALLED 300mm BELOW GROUND LEVEL. REFER TO NETWORK STANDARD NS127 FOR ADDITIONAL REQUIREMENTS REGARDING MECHANICAL PROTECTION OF UGOH CONSTRUCTIONS.
 - THE NON-METALLIC CABLE COVER KIT COMPRISES THE FOLLOWING ITEMS:
 - 3 x U-SHAPED TYPE NON-METALLIC COVER PIECES.
 - 2 x LARGE GALVANISED SADDLES.
 - 4 x SMALL GALVANISED SADDLES.
 - 1 x PRE-FIXED STAINLESS STEEL WHIPPER SNIPPER PROTECTION SHIELD.
 - THE UNDERGROUND CABLE MUST BE CLAMPED AT INTERVALS NOT EXCEEDING 1500mm.
 - THE HEATSHRINK COMPONENTS REQUIRED FOR THE BOLTED CONNECTIONS ARE PACKAGED INTO A SINGLE KIT. REFER TO ITEM 11 FOR DETAILS.
 - POSITION THE BASE OF THE TWO WAY MASTIC LINED GLOVE BODY LEVEL WITH THE INTERFACE BETWEEN THE LUG PALM AND THE LUG BARREL.
 - POSITION THE END OF THE MASTIC LINED HEATSHRINK SLEEVE WITH THE BASE OF THE MASTIC LINED GLOVE FINGERS. SHRINK THE SLEEVE STARTING AT THE GLOVE FINGERS AND WORKING TOWARDS THE SINGLE CORE CABLE.
 - THE INDIVIDUAL CORES OF THE FOUR CORE LV ABC BONDING CONDUCTOR ARE TO BE SEPARATED PRIOR TO INSTALLATION.
 - INSULATION PIERCING CONNECTORS SHALL EITHER HAVE A GREASE FILLED CAP FITTED TO SEAL THE LV CABLE BOND CONDUCTOR ENDS OR THE LV CABLE BOND CONDUCTOR ENDS SHALL BE SEALED WITH A UV INHIBITED HEATSHINK CABLE CAP.
 - THE BOLTED CONNECTION AREA IS TO BE COVERED WITH FIBREGLASS TAPE TO KEEP IT FREE OF ANY ADHESIVES FLOWING FROM THE MASTIC LINED HEATSHRINK SLEEVE.
 - ABRADE THE PVC CABLE SHEATH TO THE DIMENSIONS SHOWN ON THE CABLE TERMINATION DETAIL.
 - A MINIMUM DISTANCE OF 150mm IS TO BE MAINTAINED BETWEEN INSULATION PIERCING CONNECTORS.
 - THE LV CABLE BOND CONDUCTOR IS TO BE INSTALLED WITH A LOOP AS SHOWN TO ALLOW MOISTURE TO DRAIN AWAY FROM THE CABLE CONNECTION TERMINALS.
 - THE LV ABC FUSE SWITCH DISCONNECTOR KIT WILL COMPRISE THE FOLLOWING COMPONENTS:
 - 3 x 400A SINGLE POLE FUSE SWITCHES.
 - 3 x 400A CONNECTING LINKS.
 - 1 x UNIVERSAL POLE MOUNTING BRACKET.
 - A UV RESISTANT CABLE TIE SHOULD BE USED TO MECHANICALLY CONNECT THE LV ABC BONDING CONDUCTOR TO THE LV ABC OVERHEAD CONDUCTOR WITHIN 150mm OF THE IPC.
 - REFER TO DESIGNER SAFETY REPORT D23/319584 FOR ATYPICAL HAZARDS ASSOCIATED WITH THIS STANDARD CONSTRUCTION.

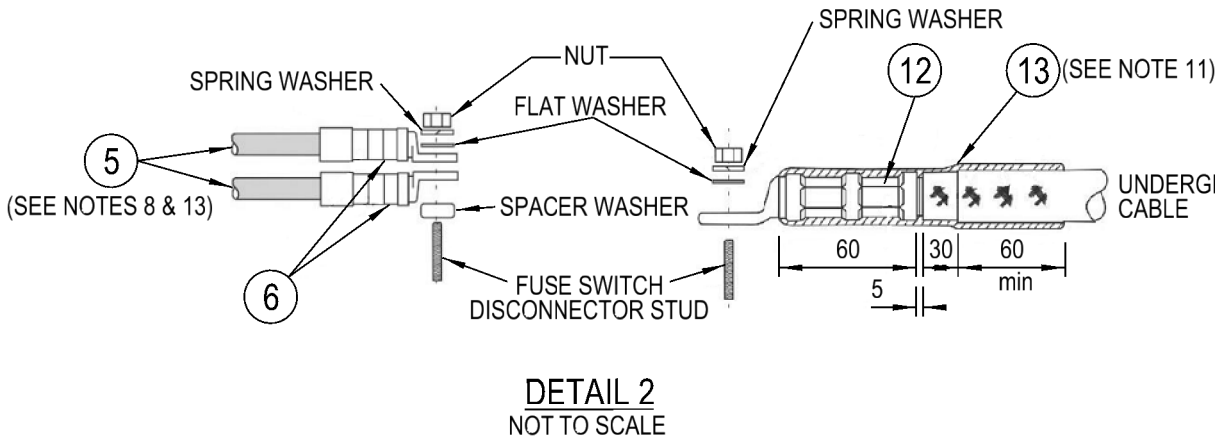

| | | | | |
|------|--|---------|------------|------|
| 19 | SHEET - NITRILE RUBBER, 200x150x3mm | | 127225 | 1 |
| 18 | TIE - CABLE, 382x7.5mm, BLACK, UV STABILISED (SEE NOTE 15) | | 59907 | A/R |
| 17 | DISCONNECTOR - KIT, FUSE SWITCH, LV ABC (SEE NOTE 14) | | 185818 | 1 |
| 16 | SCREW - COACH, M16x100mm, GALVANISED | | H40662 | 2 |
| 15 | TAPE - FIBREGLASS (SEE NOTE 10) | | 69799 | A/R |
| 14 | SCREW - COACH, M12x75mm, GALVANISED | | 50468 | A/R |
| 13 | SLEEVE - HEATSHRINK, MASTIC LINED (CUT TO 4x200mm LENGTHS) (SEE NOTE 11) | | 60186 | 1 |
| 12 | LUG - COMPRESSION, 185mm², TINNED COPPER (M12 HOLE IN PALM) | | 90183 | 4 |
| 11 | CONNECTION - KIT, BOLTED, HEATSHRINK (SEE NOTES 5, 6 & 7) | | 90324 | 1 |
| 10 | NUT - M12, HEX., STAINLESS STEEL | 515467 | 8987 | 1 |
| 9 | WASHER - SPRING, M12, STAINLESS STEEL | 518082 | 143859 | 1 |
| 8 | WASHER - FLAT, M12, STAINLESS STEEL | 518081 | 49429 | 2 |
| 7 | SCREW - SET, M12x35mm, STAINLESS STEEL | 515467 | 45021 | 1 |
| 6 | LUG - COMPRESSION, BI-METALLIC, PRE-INSULATED (FOR 150mm² LVABC) | | 150441 | 8 |
| | LUG - COMPRESSION, BI-METALLIC, PRE-INSULATED (FOR 95mm² LVABC) | | 58743 | |
| 5 | CONDUCTOR - 150mm² ABC, LV, 4C, ALUMINIUM, XLPE (SEE NOTES 8 & 13) | | 148080 | A/R |
| | CONDUCTOR - 95mm² ABC, LV, 4C, ALUMINIUM, XLPE (SEE NOTES 8 & 13) | | 67959 | |
| 4 | CONNECTOR - INSULATION PIERCING (95-150mm² LVABC/95-150mm² LVABC) (SEE NOTES 9 & 12) | | 176591 | 8 |
| | CONNECTOR - INSULATION PIERCING (95mm² LVABC/95mm² LVABC) (SEE NOTES 9 & 12) | | H19104 | |
| 3 | CONDUIT - FLEXIBLE, 70mm, GREY, PVC | | 78329 | 1.5m |
| 2 | CLAMP - CABLE, STAINLESS STEEL BAND, ADJUSTABLE (WITH NITRILE RUBBER LINER) (SEE NOTE 4) | | 177651 | A/R |
| 1 | COVER - CABLE, KIT, NON-METALLIC (SEE NOTES 2 & 3) | | 184571 | 1 |
| ITEM | DESCRIPTION | DRG. No | STOCK CODE | QTY |

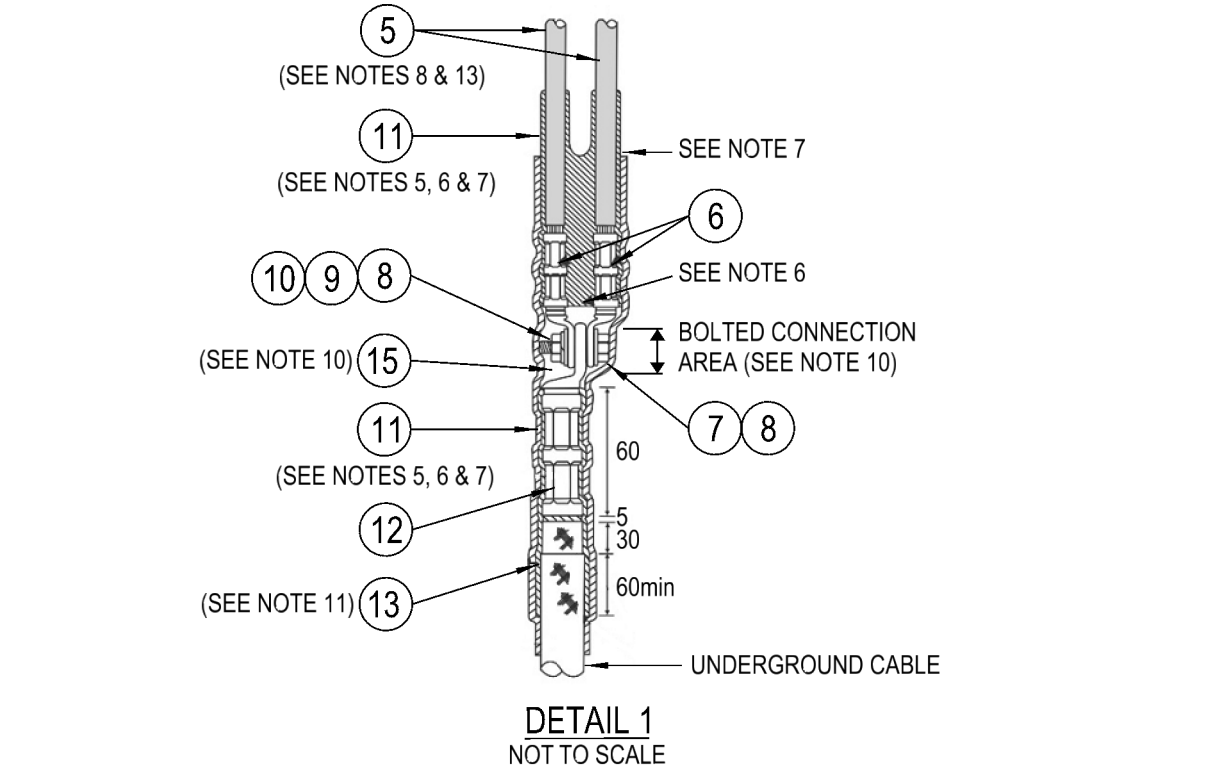

145 NEWCASTLE RD WALLSEND, NSW 2287

| | |
|------------------|------------|
| SCALE | 1:20 |
| DESIGNED | P.JONES |
| DRAWN | P.RIOS |
| CHECKED | B.WEBSTER |
| APPROVED | G.FORD |
| DATE | 16/01/2025 |
| PROJECT NUMBER | STD |
| PROJ/TRAK NUMBER | - |

| | | | |
|---|------------|-------|-----|
| STANDARD CONSTRUCTION | | | |
| DUAL LV ABC CONDUCTOR UGOH CONSTRUCTION | | | |
| FOR 185 CU1 XQ Z CABLE | | | |
| WITH FUSE SWITCH DISCONNECTOR | | | |
| 1-523 (LV1-48) | | | |
| SIZE | DRAWING No | SHEET | AMD |
| A1 | 255638 | 1 | 0 |